

**First Choice !**

**ULV cold fogger**



**NEBULO**

**The most important quality features are:**

- manufactured from strong durable and resistant thermoplastics
- powerful electric motor producing large aerosol volume at high velocity with deep penetration
- uniform droplet spectrum
- droplet size can be regulated by increasing or decreasing the solution flow


**Due to these characteristics our foggers offer the following advantages:**

- highly versatile and ideal equipment for the application of insecticides, disinfectants, deodorants
- range of the fog is deeper than with comparable units
- range of application includes space and surface treatment
- easy handling and operating of the unit

**Fields of application for NEBULO and NEBUROTOR, e.g.:**

- public health
- horticulture
- public services and utilities
- storage warehouses
- transportation
- vaccination of poultry
- disinfection
- recreation facilities
- workplaces and waste disposals
- livestock protection
- food industry
- catering trade

DIN EN ISO 9001:2008

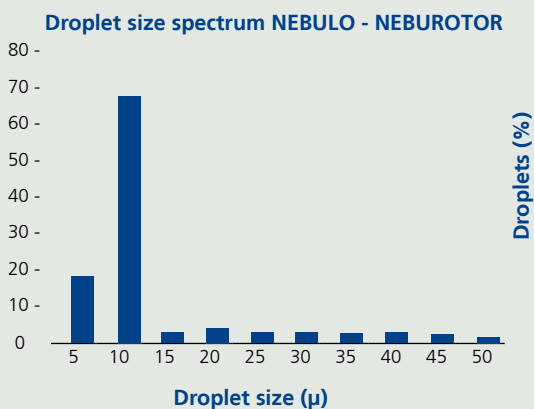

**NEBUROTOR**

The **NEBUROTOR** and **NEBULO** are fitted with an infinitely adjustable flow meter. This allows an output between 5 and maximum 250 ml/min. (0.3-15l/h). Even with the largest output, the droplet size still is under 30 µ.

The **NEBUROTOR** is the result of continuous development in order to facilitate operation and handling. The device is technically equipped like the **NEBULO**. However, the **NEBUROTOR** is fitted on a panel, through which the device can automatically rotate between 90° and 360°.

The **NEBULO** and **NEBUROTOR** can be fitted to the wall by means of a wall support. The **NEBUROTOR** has to be set to a rotation of 180°. As a further accessory, we also offer a „timer“, to program the device for automatic fogging!

**Technical specifications: NEBULO - NEBUROTOR**

<b>Electric motor*</b>	230/240 V 50/60 Cycles, 700 Watt
<b>Dimensions, H x W (in cm)</b>	40 x 35
<b>Netweight, in (kg)</b>	3.8
<b>Solution tank, Ø (in cm)</b>	25
<b>Solution tank capacity, in l (PE-HD)</b>	4
<b>Connection cable, approx. in (m)</b>	3
<b>Adjustable output, in (l/h)</b>	0.3 - 15
<b>Automatical rotation between 90° and 360°</b>	only Neburotor
<b>Optional Accessories:</b>	
<b>Kit for fresh air supply, with air hose 2 m, Ø 50 mm (optional)</b>	only for Nebulo no. 76-20-000-00
<b>Wall support (optional)</b>	Neburotor - Nebulo

\*other voltages available upon request



IGEBA Geraetebau GmbH  
Boschensaege 2  
D-87480 Weitnau | Germany

T +49 (0) 8375 9200-0  
F +49 (0) 8375 9200-22

info@igeba.de  
www.igeba.de

Technical modifications without prior notice. 01-2015